


CABLE ASSEMBLY



MULTI-CABLE EXTENSION




KCWDP 18 x 1.5 18C x 1.5mmsq PVC Economy Cable
 KCWDP 18 x 2.5 18C x 2.5mmsq PVC Economy Cable

Cat. No.	Description
EXE18/1.5-5	18C x 1.5mm multi-cable 5M, PLS-5219LM+PLS-5219LF
EXE18/1.5-10	18C x 1.5mm multi-cable 10M, PLS-5219LM+PLS-5219LF
EXE18/1.5-20	18C x 1.5mm multi-cable 20M, PLS-5219LM+PLS-5219LF
EXE18/1.5-30	18C x 1.5mm multi-cable 30M, PLS-5219LM+PLS-5219LF
EXE18/2.5-5	18C x 2.5mm multi-cable 5M, PLS-5219LM+PLS-5219LF
EXE18/2.5-10	18C x 2.5mm multi-cable 10M, PLS-5219LM+PLS-5219LF
EXE18/2.5-20	18C x 2.5mm multi-cable 20M, PLS-5219LM+PLS-5219LF
EXE18/2.5-30	18C x 2.5mm multi-cable 30M, PLS-5219LM+PLS-5219LF



TWO-FER




KCWDP 18 x 1.5 18C x 1.5mmsq PVC Economy Cable
 KCWDP 18 x 2.5 18C x 2.5mmsq PVC Economy Cable

Cat. No.	Description
TF18/1.5-1	18C x 1.5mm multi-cable 1M, PLS-5219LM+2 PLS-5219LF
TF18/1.5-1.5	18C x 1.5mm multi-cable 1.5M, PLS-5219LM+2 PLS-5219LF
TF18/1.5-2	18C x 1.5mm multi-cable 2M, PLS-5219LM+ 2 PLS-5219LF
TF18/2.5-1	18C x 2.5mm multi-cable 1M, PLS-5219LM+2 PLS-5219LF
TF18/2.5-1.5	18C x 2.5mm multi-cable 1.5M, PLS-5219LM+2 PLS-5219LF
TF18/2.5-2	18C x 2.5mm multi-cable 2M, PLS-5219LM+2 PLS-5219LF
TFF18/1.5-1	18C x 1.5mm multi-cable 1M, PLS-5219LF+2 PLS-5219LM
TFF18/1.5-2	18C x 1.5mm multi-cable 2M, PLS-5219LF+2 PLS-5219LM
TFF18/2.5-1	18C x 2.5mm multi-cable 1M, PLS-5219LF+2 PLS-5219LM
TFF18/2.5-2	18C x 2.5mm multi-cable 2M, PLS-5219LF+2 PLS-5219LM




BREAK-OUT/ BREAK-IN

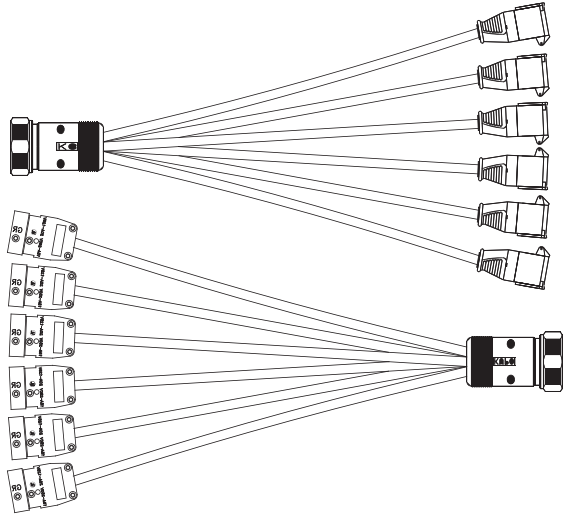

KCWH 073 x 1.5 3C x 1.5mmsq Rubber Cable
 KCWH 073 x 2.5 3C x 2.5mmsq Rubber Cable


Cat. No.	Description
BK3/1.5-1.2	3C x 1.5mm rubber cable 1.2M, PLS-5219LM+6 TSP-20LF
BK3/1.5-1.2-CEE	3C x 1.5mm rubber cable 1.2M, PLS-5219LM+6 CEE Female
BK3/1.5-1.2-M	3C x 1.5mm rubber cable 1.2M, without TSP-20LF
BK3/1.5-1.2-SCHUKO	3C x 1.5mm rubber cable 1.2M, PLS-5219LM+6 SCHUKO Female
BK3/2.5-1.2	3C x 2.5mm rubber cable 1.2M, PLS-5219LM+6 TSP-20LF
BK3/2.5-1.2-CEE	3C x 2.5mm rubber cable 1.2M, PLS-5219LM+6 CEE Female
BK3/2.5-1.5	3C x 2.5mm rubber cable 1.5M, PLS-5219LM+6 TSP-20LF
BI3/1.5-1.2	3C x 1.5mm rubber cable 1.2M, PLS-5219LF+6 TSP-20LM
BI3/2.5-1.2	3C x 2.5mm rubber cable 1.2M, PLS-5219LF+6 TSP-20LM
BI3/2.5-1.2-CEE	3C x 2.5mm rubber cable 1.2M, PLS-5219LF+6 CEE Male

MOTOR CONTROL FLY CABLE



Cat. No.	Description
MC-7/1.5-10M	7C x 1.5mm multi-cable 10M, PLS-4207LM+PLS-4207LF
MC-7/1.5-20M	7C x 1.5mm multi-cable 20M, PLS-4207LM+PLS-4207LF

DMX DATA TRANSMISSION CABLE



Cat. No.	Description
KCWDP222TBX	Dataplex 1-pair, 22AWG
KCWDP224TBX	Dataplex 2-pair, 22AWG




ID RING

ID Ring is designed for identification.
 ID RING-W White Color
 ID RING-R Red Color
 ID RING-B Blue Color

ID RING-Y Yellow Color
 ID RING-P Purple Color
 ID RING-GN Green Color
 Six standard colors are available:



HEAD TO BALLAST CABLE



Cat. No.	Description
HB-1.2K-7M	1.5mm 7M, WPS-2407LM-W+WPS-2407LF-W (ARRI 575W /1200W)
HB-1.2K-15M	1.5mm 15M, WPS-2407LM-W+WPS-2407LF-W (ARRI 575W/1200W)
HB-4K-7M	2.5mm 7M, WPS-2407LM-O+WPS-2407LF-O (ARRI 2500W/4000W)
HB-4K-15M	2.5mm 15M, WPS-2407LM-O+WPS-2407LF-O (ARRI 2500W/4000W)
HB-6K-7M	3C x 16mm+3C x 1.5mm 7M, WPS-2806LM+WPS-2806LF (ARRI 6000W)
HB-6K-15M	3C x 16mm+3C x 1.5mm 15M, WPS-2806LM+WPS-2806LF (ARRI 6000W)
HB-12K-7M	4C x 16mm+5C x 1.5mm 7M, WPS-2809LM+WPS-2809LF (ARRI 12KW)
HB-12K-15M	4C x 16mm+5C x 1.5mm 15M, WPS-2809LM+WPS-2809LF (ARRI 12KW)
HB-18K-7M	4C x 16mm+5C x 1.5mm 7M, WPS-2809LM+WPS-2809LF (ARRI 18KW)
HB-18K-15M	4C x 16mm+5C x 1.5mm 15M, WPS-2809LM+WPS-2809LF (ARRI 18KW)

YS-2.5



Y-SPLITTERS

KUPO Y-SPLITTERS constructed by PVC injection-molding core and rubber molding cover comes with overall length 100cm 3C X 2.5MM rubber cable (bare ends). Parallel wired makes it easier to enable a single input into two outputs with the same voltage. Also the Y-Splitters is for 16 ampere with CE approval.

YS-2.5-CEE

Y-Splitters with 16A CEE form plugs included one male and two females.



POWER SPLITTER RUBBER BOX

It is molded of sturdy rubber fully insulated, providing shock, impact, corrosion and weather resistance, and feasible for use with 19-pin, CEE and other connectors. Durable and Portable. Compact size allows truss access and standing foots for floor application. There is a hooking ear on the box which is for a safety hooking with CEE protection cap.

- PDB-RB Box (with 12 screws)
- PDB-19PRB Box with 1 x PLS-5219SM and 2 x PLS-5219SF SOCKETS
- PDB-16CRB Box with 1 x 16A CEE MALE and 2 x FEMALE SOCKETS

