


## TL/ TE/ TJ SERIES


TJ is equipped with built-in DMX processor, so their wiring is far different from that of TE/TL.

Model	TL series	TJ series	TE series
Power Require	DC/21-26V	DC/21-26V	DC/21-26V
Avail. in Length	20/40/60/80/100cm	20/40/60/80/100cm	20/40/60/80/100cm
Power Cons.	4/8/12/16/20W	3/6/8/12/15W	3/6/8/12/15W
Plastic Cover	PC	Arcylic	Arcylic
LED Angle	15	110	110
Brightness (LUX/m)	80/160/240/360/400	30/60/90/120/150	30/60/90/120/150
IP Rating	IP20	IP65	IP65

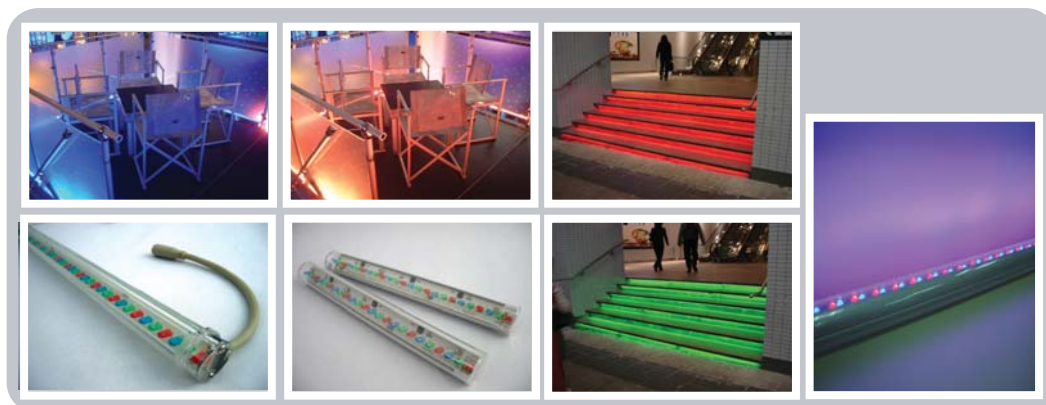

## GQ/ GL/ FL/ FD SERIES IP65

Model	GQ-63	GL-60A	FL-090	FD-090
Power Cons.	3W, DC/24V	6W, DC/24V	12W, DC/24V	12W, DC/24V
LED Lamps	12, 3-in-one (SMD)	45	90	90
LUX/M	15	350	700 (clear lens)	700 (clear lens)
Built-in DMX	no	no	no	yes
Dimension	90 x 55 x 39 mm	90 x 55 x 39 mm	120 x 60 mm	120 x 60 mm
Weight	0.35kg	0.35kg	0.45kg	0.45kg

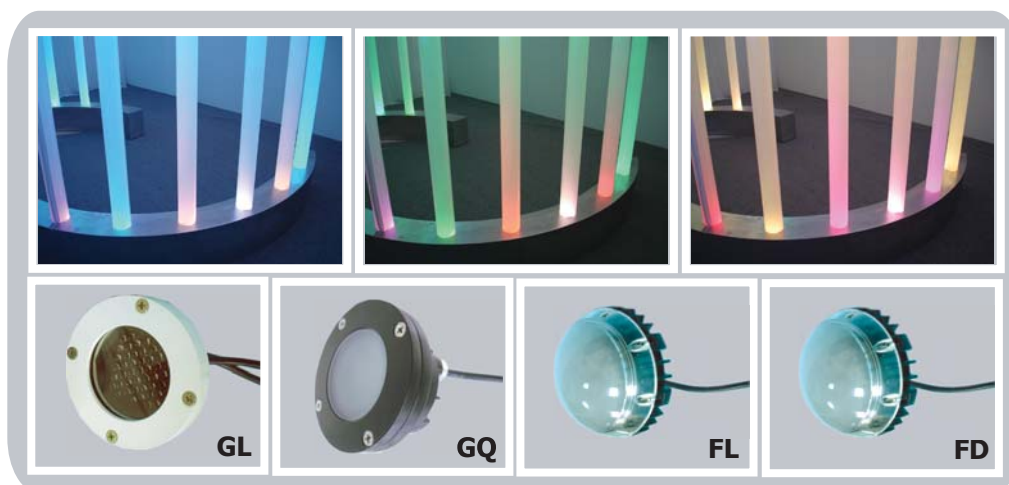

Model	FU tubes
LED	12 pcs per 10 cm
Input Voltage	DC 16~30V
Beam Angle	300 NIT
Power Consumpt.	1.2W
IP Rating	IP65
Series Length	75 pcs (DC24V) ; 3A
Diemension	10(L) x 10(W) x 1.5 (H) cm

