

# HEAD-TO-BALLAST

## PROFESSIONAL HB CONNECTOR

The KUPO HB connectors' range is designed to meet the needs of head to ballast connections. HB series cover the range of power from 575W to 18KW used by Arri.


### Features:

Compatible with Veam CIR connectors

Machined aluminum bodies with ribbed coupling ring to provide easy manual coupling and uncoupling, Back-shell with scratch-resistant and black anodized, Back-shell and cable clamps to fit different cable O.D., Waterproof to IP67, The grip rubber on locking ring



### Contacts Configuration & Key Position Arrangement

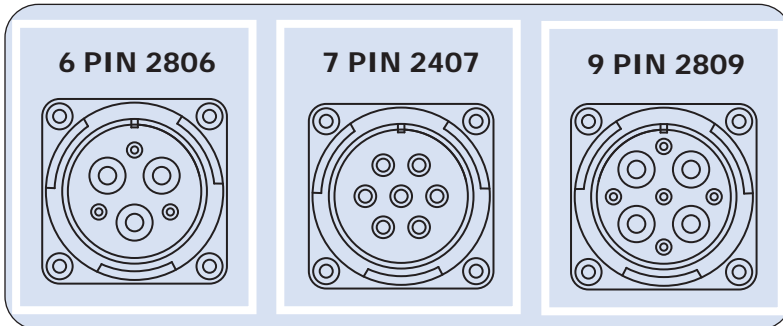

We keep all the above models in stock for inline male and female assembly. WPC-2407 series are available in different key position arrangement for various lighting fixtures; WPC-2806 & WPC-2809 series are only for 6K-18K Arri lights.

### WPC-2407LM



### WPC-2407LF



### WPC-2806LF



### WPC-2806LM



### WPC-2809LM



### WPC-2809LF



### Cross Reference for Various Brands

BRAND	ARRI	CINEMILLS	STRAND	MOLE	SUNRAY	LTM	De-Sisti
575W	2407-W	2407-Z	2407-Z	2407-Z	2407-Z		2407-Z
1200W	2407-W	2407-W	2407-W	2407-W	2407-W		2407-W
2500W	2407-O	2407-O	2407-O		2407-O	2407-O	2407-O
4000W	2407-O						
6000W	2806						
12KW	2809						
18KW	2809						